

ENGINEERING SPECIFICATION

Zurn Z1099 backwater valve features Dura-Coated cast iron body, plastic ball float, bronze backwater bushing, and replaceable neoprene seat.

	Dimensions in inches [mm]			
Product Designation	A Pipe Size	в	с	Approximate Weight Ib [kg]
-3	3 [76]	3 [76]		7 [3]
-4	4 [102]	4 [102]	6-1/2 [165]	9 [4]
-6	6 [152]	6 [152]		25 [11]


PIPE SIZE

LIST PRICE

PREFIXES DESCRIPTION

∽ E	3	
		C
/	<i>۱</i>	

Z1099*	D.C.C.I. Body	3" 4", 6"	Combine with connection type for pricing			
CONNECTION DESIGNATION (SPECIFY PIPE SIZE IN INCHES AND TYPE OF CONNECTION)						
PRODUCT DESIG.	CONNECTION TYPE	PIPE SIZE/OUTLET TYPE	ADD			
-3	Threaded x No-Hub	3IP x 3NH	580.00			
	No-Hub x No-Hub	3NH x 3NH	580.00			
-4	Threaded x No-Hub	4IP x 4NH	580.00			
	No-Hub x No-Hub	4NH x 4NH	580.00			
-6	Threaded x No-Hub	6IP x 6NH	1,199.00			
	No-Hub x No-Hub	6NH x 6NH	1,199.00			
SUFFIXES			ADD			
-G	Galvanized Cast Iron	3", 4"	107.00			
		6"	272.00			
BEST SELLE	RS		LIST PRICE			
Z1099-3NHX2NH			580.00			
Z1099-3N	HX3NH	580.00				
Z1099-4N	HX4NH	580.00				

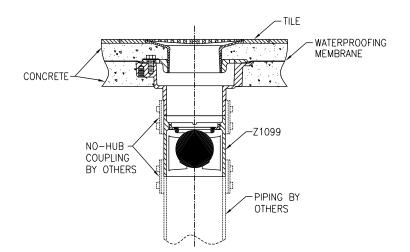

Z1099 shown installed on the outlet of a floor drain. In order for the Z1099 to operate properly, it must always be installed in a vertical position as illustrated.



877-903-7246 www.commercialplumbingsupply.com

For additional product information, please visit www.zurn.com

INTRO

ROOF DRAINS

FLOOR DRAINS

T, P, BW VALVES

SANI-FLOR

TECH INFO

174

SS DRAINS